

CERTIFICATE

of constancy of performance

1922 - CPR - 2429

In compliance with Regulation (EU) 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

Fire detection and fire alarm systems. Fire alarm devices - Visual alarm devices. Components using radio links.

EN54 FireProtect (VAD) Jeweller, Model: FP.54V.J-000-EU

Trade mark: AJAX

(with the performance listed, see Annexes I and II to 1922-CPR-2429 that are an inseparable part of this certificate)

placed on the market under the name or trade mark of

AJAX SYSTEMS CYPRUS HOLDINGS LTD

Ifigeneias, 17, Strovolos, 2007, Nicosia, Cyprus

and produced in the manufacturing plant

001

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standards

EN 54-23:2010; EN 54-25:2008, EN 54-25:2008/AC:2012;


under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

This certificate was first issued on 25.07.2025 and will remain valid until 15.07.2028 as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit and is reissued after each surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address www.dedal-bg.net.



Manager:

Banueba



dipl. eng. Anna Vasileva

Issued:
Burgas, 25 July 2025

Ref. No. 01-00

ANNEX I TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922-CPR-2429/ 25.07.2025

Performance list, acc. to EN 54-23:2010

Essential Characteristics	Performance	Clause
Operational reliability		
- Duration of operation	Pass	4.2.1
- Provision for external conductors	N/A	4.2.2
- Flammability of materials	Pass	4.2.3
- Enclosure protection	Pass	4.2.4
- Access	Pass	4.2.5
- Manufacturer's adjustments	Pass	4.2.6
- On-site adjustment of behavior	N/A	4.2.7
- Requirements for software controlled devices	Pass	4.2.8
Performance parameters under fire conditions		
- Coverage volume	Pass	4.3.1
- Variation of light output	Pass	4.3.2
- Minimum and maximum light intensity	Pass	4.3.3
- Light colour	Pass	4.3.4
- Light pattern and frequency of flashing	Pass	4.3.5
- Marking and data	Pass	4.3.6
- Synchronisation	Pass	4.3.7
Durability, temperature resistance		
- Dry heat (operational)	Pass	4.4.1.1
- Dry heat (endurance)	Pass	4.4.1.2
- Cold (operational)	Pass	4.4.1.3
Durability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	4.4.2.1
- Damp heat, steady state (endurance)	Pass	4.4.2.2
- Damp heat, cyclic (endurance)	Pass	4.4.2.3
Durability, shock and vibration resistance		
- Shock (operational)	Pass	4.4.3.1
- Impact (operational)	Pass	4.4.3.2
- Vibration, sinusoidal (operational)	Pass	4.4.3.3
- Vibration, sinusoidal (endurance)	Pass	4.4.3.4
Durability of operational reliability, corrosion resistance		
- Sulphur dioxide (SO ₂) corrosion (endurance)	Pass	4.4.4
Durability, electrical stability		
- Electromagnetic compatibility (EMC), immunity (operational)	Pass	4.4.5



Manager:

Anna Vasileva



dipl. eng. Anna Vasileva


Issued:
Burgas, 25 July 2025

Ref. No. 01-00

ANNEX II TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922-CPR-2429/ 25.07.2025


Performance list, acc. to EN 54-25:2008; EN 54-25:2008/AC:2012

Essential Characteristics	Performance	Clause
Performance under fire conditions		
- General	Pass	4.1
- Alarm signal integrity	Pass	4.2.2
- General	Pass	5.2
- Reproducibility test	Pass	8.3.7
Response delay (response time to fire)		
- Test for alarm signal integrity	Pass	8.2.3
- Test for mutual disturbance between systems of the same manufacturer	Pass	8.2.6
Operational reliability		
- Immunity to site attenuation	Pass	4.2.1
- Identification of the RF linked component	Pass	4.2.3
- Receiver performance	Pass	4.2.4
- Immunity to interference	Pass	4.2.5
- Loss of communication	Pass	4.2.6
- Antenna	Pass	4.2.7
- Power supply equipment	Pass	5.3
- Environmental related requirements	Pass	5.4
- Documentation	Pass	6
- Marking	Pass	7
- Test for immunity to site attenuation	Pass	8.2.2
- Test for identification of RF linked components	Pass	8.2.4
- Test for identification of RF linked components	Pass	8.2.5
- Test of compatibility with other band users	Pass	8.2.7
- Test for the detection of a loss of communication on a link	Pass	8.2.8
- Test of the antenna	Pass	8.2.9
- General	Pass	8.3.1
- Test schedule for components tests	Pass	8.3.2
- Verification of the service life of the autonomous power source(s)	Pass	8.3.3
- Test for the low power condition fault signal	Pass	8.3.4
- Test for the polarity reversal	N/A	8.3.5
- Repeatability test	Pass	8.3.6
Durability of operational reliability and response delay, temperature resistance		
- Dry heat (operational)	Pass	8.3.9
- Dry heat (endurance)	Pass	8.3.10
- Cold (operational)	Pass	8.3.11
Durability of operational reliability, vibration resistance		
- Shock (operational)	Pass	8.3.16
- Impact (operational)	Pass	8.3.17
- Vibration, sinusoidal (operational)	Pass	8.3.18
- Vibration, sinusoidal (endurance)	Pass	8.3.19
Durability of operational reliability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	8.3.12
- Damp heat, steady state (operational)	N/A	8.3.13
- Damp heat, steady state (endurance)	Pass	8.3.14
Durability of operational reliability, corrosion resistance		
- SO2 corrosion (endurance)	Pass	8.3.15
Durability of operational reliability, electrical stability		
- Electromagnetic compatibility (EMC), immunity tests (operational)	Pass	8.3.20

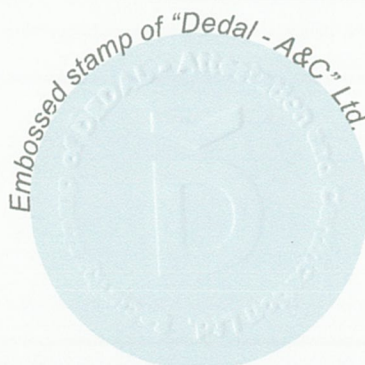

Manager:

Anna Vasileva



dipl. eng. Anna Vasileva

Issued:
Burgas, 25 July 2025

Ref. No. 01-00